

OREGON CORNER RESTORATION FORM:

SECTION  $\frac{12}{13} \frac{7}{18}$  TOWNSHIP 25, RANGE 25E | 26E  
 COUNTY MORROW, DATE JUNE 1, 2001.

CORNER DESIGNATION: J-1

R25E R26E

$\frac{12}{13} \frac{7}{18}$

T2S

PREVIOUS RENEWALS, SURVEYS, ETC.

CONDITION REPORT ONLY  
 NOT FOUND  
 RENEWED  
 UNRECORDED  
 SURVEYED IN  
 REFERENCED


Original 1867 GLO Survey by B.T. Panges.

He drove a charred stake and raised a mound.

MONUMENTS AND ACCESSORIES FOUND: Condition and Source

Good North-South fence line with a fence to the East intersecting. Some stones may have been from rock-jacks (some rotted wood) in the Northeast Quadrant of the fence intersection.

MONUMENT DETAIL:

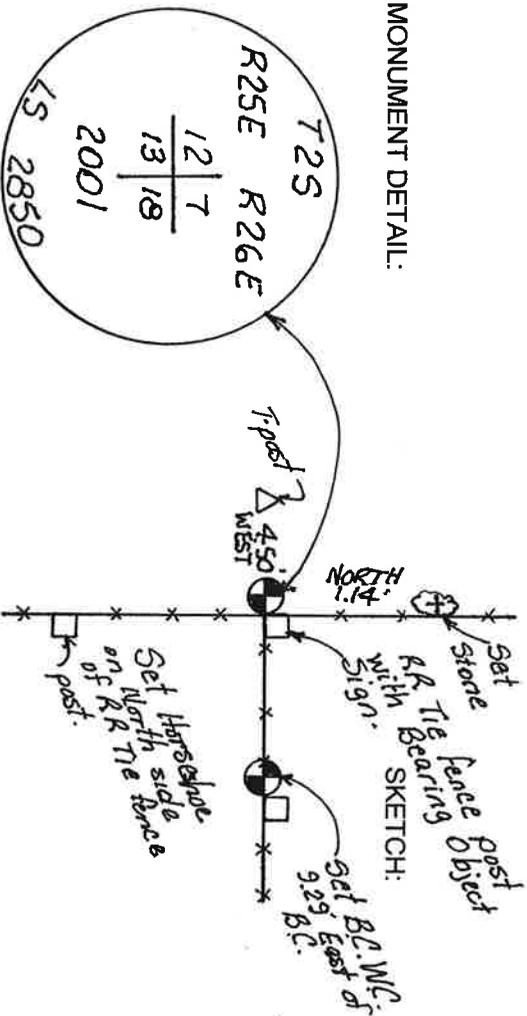

NEW MONUMENT SET (PROCEDURES AND DESCRIPTION):

Set 2 3/8" Brass Cap on 1" x 30" Galvanized pipe, stamped as shown. After comparing the location of this fence intersection with the data of a GPS Search and Survey along this Range line, I determined that this fence intersection was a reasonable fit with the record and was the best remaining evidence of the location of the original corner, I then set the above noted Brass Cap.

NEW ACCESSORIES SET:

1. Set a 4" x 15" x 16" Stone, with a cross chiseled in top, North 1.14 feet.
2. Set a 2 3/8" Brass Cap on a 1" x 30" Galvanized pipe, East 9.29 feet.
3. Set a 2.3 ft. Steel T post 1.3' deep, West 4.50 feet.
4. Set a #2 Horseshoe marked RC (on RR Tie fence post) 4' High, South 8.31 feet.
5. Set a Morrow County Bearing Object sign on RR Tie fence post, Northeast 0.50 feet.

LOCATION AND COMMENTS:

COMPASS DEC. Not Observed

SURVEYOR'S SEAL

RECEIVED BY

Morrow County Surveyor  
 Date 08-01-01  
 Rec'd By RVM  
 No. C-1314-M

FIRM: COPPOCK SURVEYING  
 P. O. BOX 340  
 HERMISTON, OR 97838  
 541-567-6974

PARTY CHIEF: J COPPOCK  
 NOTE KEEPER: S. BENEFIT  
 WITNESS: S. BENEFIT



RENEWAL DATE: DEC. 31/01