

CERTIFIED RECORD OF LAND CORNER MONUMENTATION

*E-8*

History of original corner establishment:

Corner not previously established.


<b>DIAGRAM</b>	
TSS R28E	
S5	
E1/16--	
S8	
1984	
PLS 848	

Description of corner evidence found:

Corner not previously established.

Description of monument and accessories | established to perpetuate the original location of this corner:

Set 2-1/2"x30" aluminum pipe with 2-1/2" aluminum cap, stamped as shown on the DIAGRAM, SET 25" in the ground.  
 From Which.  
 A Lodgepole Pine 8" dia. Bears, N73°E., 35.6 ft., scribed: E1/16 S5 BT  
 A " " 12" dia. Bears, S17°W., 42.7 ft., scribed: E1/16 S8 BT  
 Measurements to trees taken with a metal tape and magnetic compass, with Declination set off 20 deg. East.  
 Nailed a brass washer stamped PLS 848 on blaze above BT scribe, Bearing Tree Sign above blaze, and warning sign on back of each tree. Painted a 6" red band at breast ht. around each tree. Set steel fence posts with warning & Boundary Signs, North & East, 5 ft. from the corner.

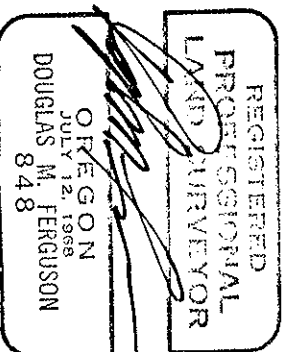

RECEIVED BY  
 Morrow County Surveyor  
 Date 1-10-86  
10600 MLD  
744-K

Work by D.M. Ferguson, PLS 848, Mt. Vernon Ore.  
 On Aug. 6, 1984  
 Witnessed by J. David Brinton, PLS 2065

Office of SURVEYOR County of MORROW  
 State of OREGON I hereby certify that the within instrument was filed in this office  
 for record on the 10 day of September, 1985  
David H. Krumbein by J. David Brinton  
 (COUNTY OFFICIAL) (DEPUTY)