


CERTIFIED RECORD OF LAND CORNER MONUMENTATION

J-5

History of original corner establishment:

Corner originally established 1882 under Contract Survey No. 417, dated 1881.

Corner reestablished by Dependent Resurvey authorized 1938 and approved Feb. 21, 1941.

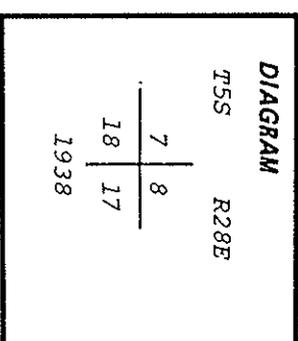

Description of corner evidence found:

2" iron pipe with 2 1/2" brass cap marked as shown above, from which ---

23" White Fir, alive and standing, bears N 73° E (Rec. N 75° E), 26.0' (Rec. 25.7') blaze healed, scar visible.

15" Fir stump, 12" high, bears S 65° E (Rec. S 64° E), 34.2' (Rec. 34.3') no markings visible.

9" L.P. Pine, alive and standing, bears S 75° W (Rec. S 76° W), 32.8' (Rec. 33.0') scribing visible.

9" L.P. Pine, dead and standing, bears N 50° W (Rec. N 48° W), 7.0' (Rec. 6.6') Scribing T5S28E57BT legible.

Description of monument and accessories | established to perpetuate the original location of this corner:

From corner location as found and described above,


New Bearing Tree, 12" Fir, bears N 64° W 60.8", Marked T5S R28E 57 BT

New Bearing Tree, 9" L.P. Pine, bears S 4° E 11.7', Marked T5S R28E 517 BT

Attached USFS signs, 54-4 and 54-3 to all Bearing Trees, painted blazes and a 6" band of fluorescent red around all trees.

Attached brass tag (Marked R.L.S. 1024) to new trees.

Set 6' steel post 5' East of corner and attached USFS sign 54-2 over 54-4.

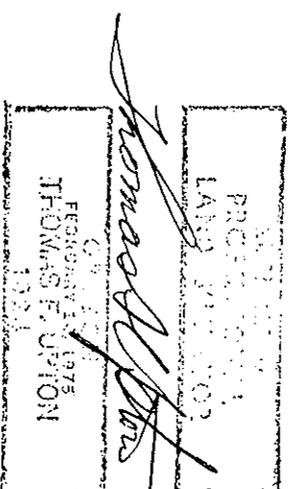

Thomas F. Upton, Certificate No. R.L.S. 1024

Office of Les Sullivan Surveyor..... County of Marion.....
 State of Oregon..... I hereby certify that the within instrument was filed in this office
 for record on the 12th day of January, 1982
Barbara A. Kumburn by Martha A. Hughes
 (COUNTY OFFICIAL) (DEPUTY)

Form R6-7100-57 (9/71)

RECEIVED BY ☆ GPO-798-276

Morrow County Surveyor

Date Jan 12, 1982

Rec'd By M. Hughes

No. 4661K

Ref. arwq, ne C-459-K