


**CERTIFIED RECORD OF LAND CORNER MONUMENTATION**

L-25

**History of original corner establishment:**

The East 1/4 corner of Sec. 13, T6S R25 E., W.M. not previously established of record.

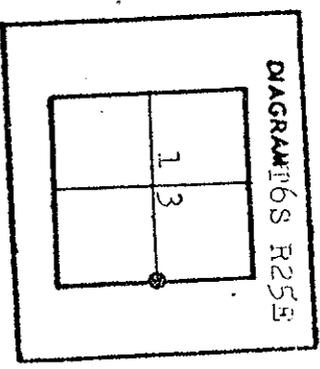

**Description of corner evidence found:**

None.

I establish, by survey, the East 1/4 corner of Sec. 13 on the Range line latitudinally at mid point between the NE and the SE corners of Sec. 13 and longitudinally on line between the West 1/4 corner of Sec. 18 and the Northwest corner of Sec. 18, T6S., R.26E.

See my recorded Survey, dated Oct. 1980.

**Description of monument and accessories established to perpetuate the original location of this corner**

At the corner point:  
Set a 1 1/2"x30" iron pipe 30" in the ground with brass cap marked as shown.

From which I scribe NEW BEARING TREES:

A tamarack 4" in diam. bears S. 17° W., 48.6 ft., mkd. 1/2S13 BT.

A juniper 9" in diam. bears N. 66° W., 23.5 ft., mkd. 1/4S13 BT.

Surrounded pipe with mound of stone, 3 ft. base.

Used magnetic compass with 20° East variation and steel tape, measuring to face of BT blaze.

Done Oct. 27, 1980.

Witness: G. L. Earl, O.P.L.S.

T6S R25E  
1/2 S13  
1980  
OPLS 598

BRASS CAP MARKED.

REGISTERED  
PROFESSIONAL  
LAND SURVEYOR

*Robert D. Baggett*  
ROBERT D. BAGGETT  
JULY 12, 1963  
OREGON  
598

Office of ..... Surveyor ..... Morrow .....  
 State of ..... Oregon ..... I hereby certify that the within instrument was filed in this office  
 for record on the 12<sup>th</sup> day of November, 1980, by .....  
 (COUNTY OFFICIAL) (DEPUTY)

RECEIVED BY

Morrow County Surveyor

Date 11-10-80

Rec'd By W.S.A.J.

No. # 4106-K