


CERTIFIED RECORD OF LAND CORNER MONUMENTATION

N-19

DIAGRAM T6S R25E

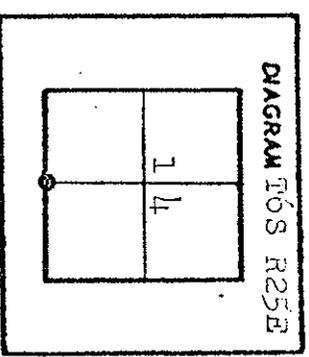

**History of original corner establishment:**

Corner originally established by E. W. Sanderson under Contract No. 368, dated Sept. 7, 1880.

**Government field notes state:**

Set stone 12x12x6 in stone mound for ¼ sec. cor. from which:

A pine 12" in diam. S. 50 ° W., 53 lks.

A fir 15" in diam. N. 60° E., 47 lks.

**Description of corner evidence found:**

I found the original corner stone, a basalt stone 13"x10"x7" marked ¼, set in a mound of stone.

**from which the ORIGINAL BEARING TREES:**

A pine stump 23" in diam. bears N. 66° E., 30.3 ft. mkd. BT. The remains of a fir stump 6" in diam. bears S. 40° W., 34.3 ft. mkd. ¼S BT.

See my recorded Map of Survey dated Oct. 1980. Description of monument and accessories I established to perpetuate the original location of this corner

**At the corner point:**

Set a 1½"x30" iron pipe 21" in the ground with brass cap marked as shown:

**From which I scribe NEW BEARING TREES:**

A red fir 17" in diam. bears N. 1° W., 27.0 ft. mkd. ¼ S14 BT.

A red fir 16" in diam. bears S. 43° W., 35.2 ft. mkd. ¼ S23 BT.

Buried corner stone East and alongside iron pipe and surrounded pipe with a mound of stone, 3 ft. base, to top of pipe.

Used magnetic compass with 20° East variation and steel tape, measuring to the face of BT blaze.

Done: Oct. 15, 1980.

Witness: G. L. Earl, O.P.L.S.

T6S R25E  
 S14  
 ¼  
 S23  
 1980  
 OPLS 598

BRASS CAP MARKED.

REGISTERED  
 PROFESSIONAL  
 LAND SURVEYOR

*Robert D. Baggett*  
 OREGON  
 JULY 12, 1963  
 ROBERT D. BAGGETT  
 598

Office of..... Surveyor..... Country of..... Morrow.....  
 State of..... Oregon....., I hereby certify that the within instrument was filed in this office  
 for record on the 12 day of November, 1980.  
*David H. Blair*  
 (COUNTY OFFICIAL) by (DEPUTY)

RECEIVED BY

Morrow County Surveyor

Date 11-10-80

Rec'd by Wm. J. J.

No. # 398-K

refer to survey no. # 398-K