


CERTIFIED RECORD OF LAND CORNER MONUMENTATION

T6S, R25E

2-7

History of original corner establishment:

This corner was established by E.W. Sanderson in 1881 during his retracement under G.L.O. contract No. 368. He set a stone 19"x12"x7" in a stone mound from which:  
 A Pine, 10" dia., bears N50°E, 25 links

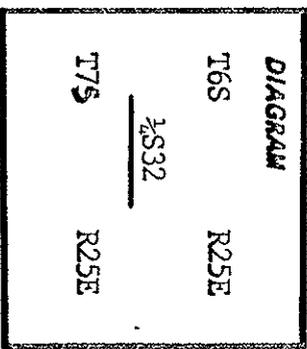

Description of corner evidence found:

I found a stone 16"x14"x8" in a stone mound from which:  
 Dead P. Pine, 16" dia., bears N67°E, 15.8 ft. with scribing visible on open blaze.  
 No marking was evident on the corner stone.


Description of monument and accessories | established to perpetuate the original location of this corner:

I set a 2 1/2"x30" alum. pipe in a stone mound with the original stone buried along side. The pipe has a 3" alum. cap containing a magnet and marked:


- From which:
- New B.T.'s
- P. Pine, 8" dia., bears N36 1/2°E, 35.0 ft.
- P. Pine, 10" dia., bears N36 1/2°W, 35.0 ft.

The original B.T. has an "attention" sign, a B.T. tag, and a 6" red enamel stripe. The new B.T.'s have an addition an alum "PLS 1832" washer and are scribed according to the manual.

There is a 6' steel fence post with an "attention" sign within 5' of the corner.



*Fayette S. Munro*

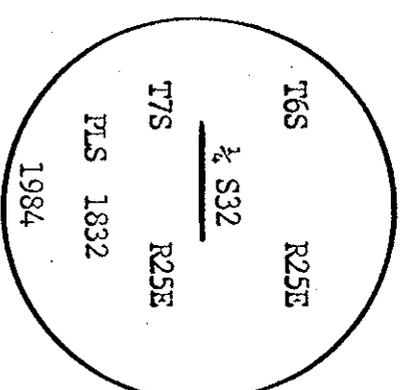

RECEIVED BY  
 Morrow County Surveyor  
 Date 10/24/84  
 Rec'd By MLO  
 No. 698-K

Office of..... SURVEYOR ..... County of..... MORROW .....  
 State of... OREGON ..... I hereby certify that the within instrument was filed in this office  
 for record on the... 7th... day of... July ..... , 1984 -  
 ..... David H. Lewis ..... by .....  
 (COUNTY OFFICIAL) (DEPUTY)