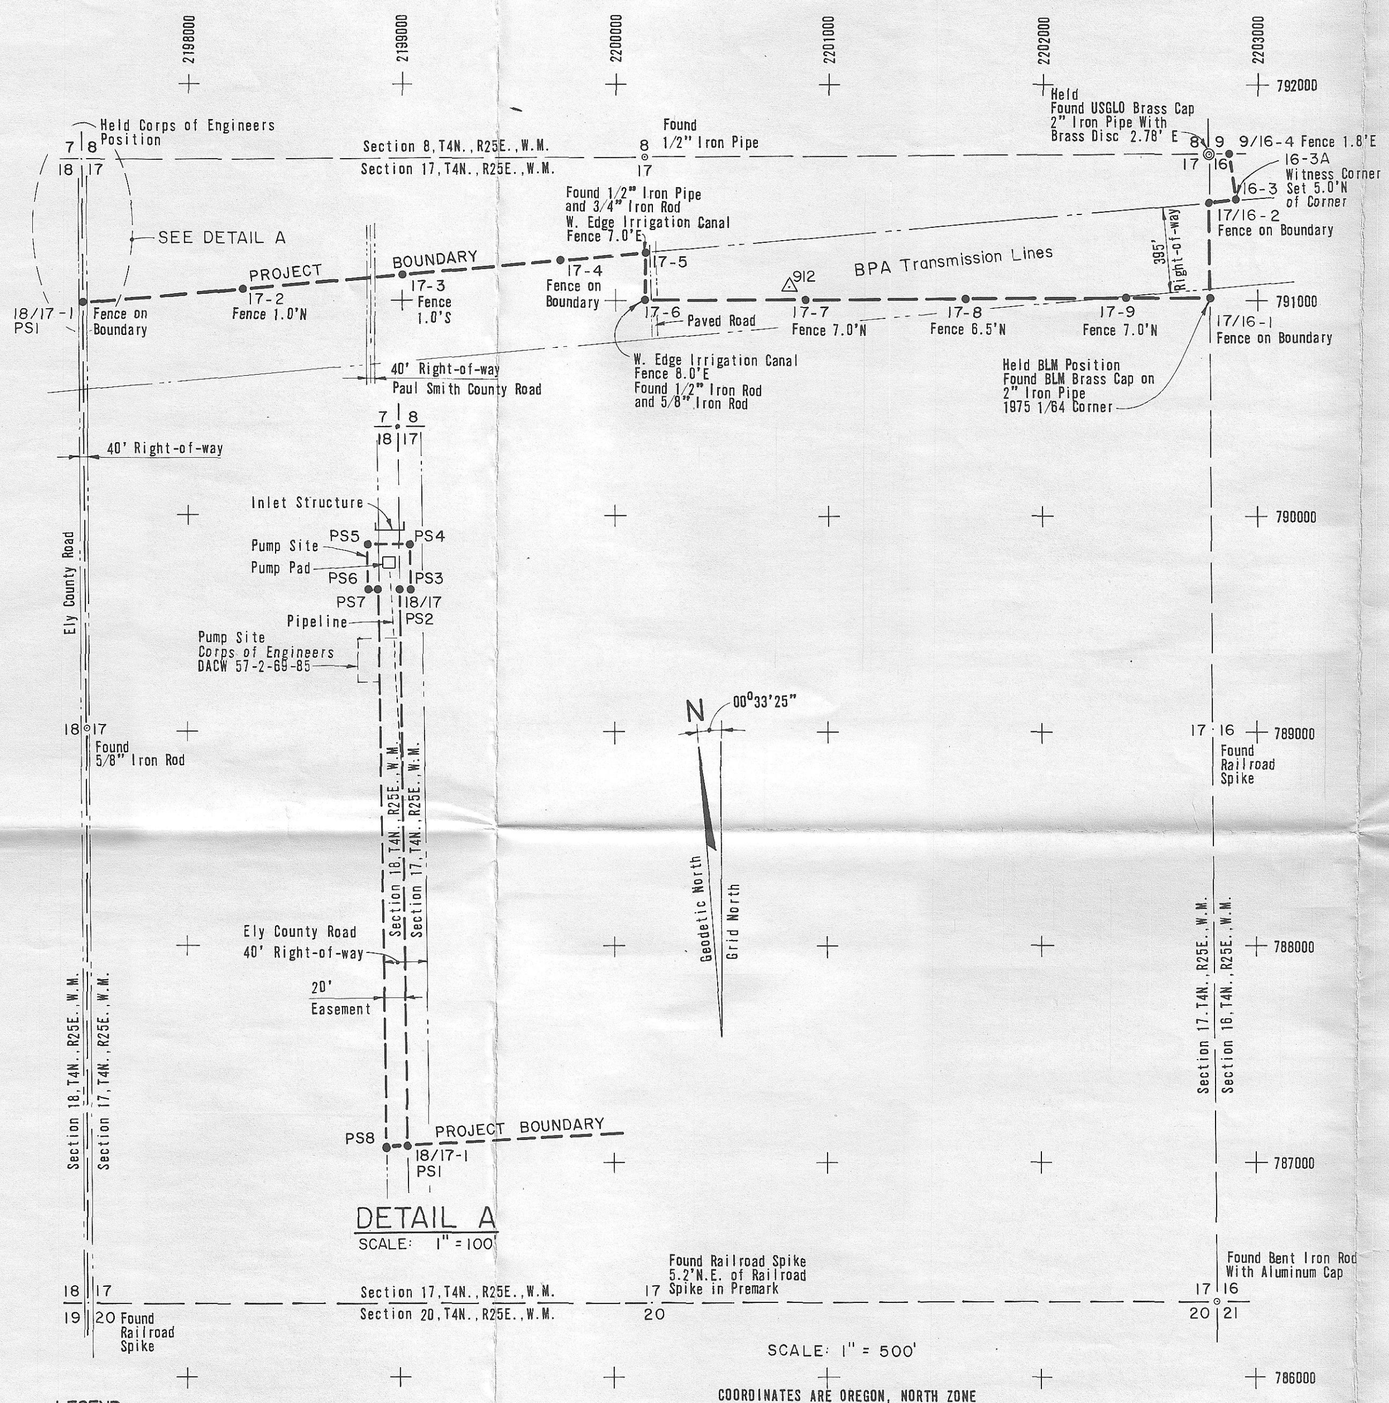

MARK	NORTHING	EASTING	BEARING	DISTANCE	RECOVERY RECORD
Section 17 Boundary					
N.W. Corner	791640.34	2197494.32			
			S00°41'33" E	2634.24'	
W. ¼ Corner	789006.29	2197526.15			
			S00°13'20" E	2662.81'	
S.W. Corner	786343.51	2197536.48			
			N89°49'34" E	2642.24'	
S. ¼ Corner	786351.52	2200178.71			
			N89°49'18" E	2642.28'	
S.E. Corner	786359.75	2202820.97			
			N00°25'45" W	2658.94'	
E. ¼ Corner	789018.61	2202801.06			
			N00°28'10" W	2660.97'	
N.E. Corner	791679.49	2202779.25			
			S89°30'27" W	2646.65'	
N. ¼ Corner	791656.74	2200132.70			
			S89°38'38" W	2638.43'	
N.W. Corner	791640.34	2197494.32			
Project Boundary					
18/17-1	790975.74	2197502.35			
			N84°49'40" E	750.00'	
17/2	791043.35	2198249.30			
			N89°49'40" E	750.00'	
17-3	791110.96	2198996.24			
			N89°49'40" E	750.00'	
17-4	791178.58	2199743.19			
			N89°49'40" E	394.96'	
17-5	791214.18	2200136.54			
			S00°29'49" E	218.52'	
17-6	790995.67	2200138.43			
			N89°35'50" E	750.00'	
17-7	791000.94	2200888.41			
			N89°35'50" E	750.00'	
17-8	791006.21	2201638.40			
			N89°35'50" E	750.00'	
17-9	791011.49	2202388.38			
			N89°35'50" E	396.33'	
17/16-1	791014.27	2202784.70			
			N00°28'10" W	439.30'	
17/16-2	791453.56	2202781.10			
			N84°49'40" E	120.00'	
16-3	791464.38	2202900.61			
			N06°20'26" W	216.26'	
9/16-4	791678.36	2202869.24			
Pump Station Easement					
18/17-1 PS1	790975.74	2197502.35			
			N00°41'33" W	517.00'	
18/17 PS2	791492.70	2197496.10			
			N89°18'27" E	10.00'	
PS3	791492.82	2197506.10			
			N00°41'33" W	40.00'	
PS4	791532.82	2197505.62			
			S89°18'27" W	40.00'	
PS5	791532.34	2197465.62			
			S00°41'33" E	40.00'	
PS6	791492.34	2197466.11			
			N89°18'27" E	10.00'	
PS7	791492.46	2197476.11			
			S00°41'33" E	518.57'	
PS8	790973.93	2197482.37			
			N89°49'40" E	20.08'	
18/17-1 PS1	790975.74	2197502.35			
Horizontal Control Monument					
912	791054.04	2200815.95			
913	791362.67	2204339.17			

LEGEND:

- ● Set 4-inch cast aluminum monument stamped Corps of Engineers-U S Army Project Boundary, Survey Mark.
- △ Horizontal Control Monument

COORDINATES ARE OREGON, NORTH ZONE
BEARINGS SHOWN ARE ORIENTED TO GRID.
GRID FACTOR 0.9999474

JOHN DAY PROJECT BOUNDARY AND PUMP SITE

BOARDMAN AREA

By CH2M HILL INC.

For The CORPS OF ENGINEERS

SECTIONS 16 AND 17, T 4N., R 25E., W.M.

MORROW COUNTY OREGON

Surveyed March 1979 **Sheet 1 of 1**

REGISTERED PROFESSIONAL LAND SURVEYOR
Kenneth R. Wengler
OREGON JULY 13, 1973 KENNETH R. WENGLER 1002

4-10-79
S.L.B
C-# 277-K

C-277-K-422