


CERTIFIED RECORD OF LAND CORNER MONUMENTATION

**History of original corner establishment:**

Original corner established by Frank W. Campbell, U.S. Deputy Surveyor, under Contract No. 468, dated April 12, 1883. The original notes state that at the corner a marked tamarack post, 3' long and 3" square was set 24" in the ground from which:

A 10" tamarack bears S33°W-6 lks dist. mkd 1/4 S BT.  
A 15" tamarack bears N30°E-22 lks dist mkd 1/4 S BT.

In 1979, this corner was set in error by proportional measure, by LS 1106. Evidence of the original corner was found by PLS 1106 in 1987 as indicated below. The 1979 monument was moved to its present position.

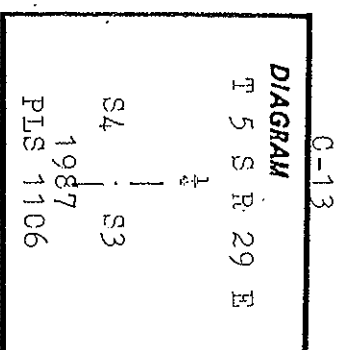

**Description of corner evidence found:**

Rotted remains of the original post from which:  
A 13" down western larch bears N28½°E-15.3' (record N30°E-22 lks), rolled tree over to reveal healed double blaze. Opened upper blaze and found scribes "1/4 S".

**Description of monument and accessories | established to perpetuate the original location of this corner:**

Moved 1979 monument to proper position, a move of S38°52'E-25.43'. Reset the 1979 monument, a 3" brass cap on 2½" by 30" galv. iron pipe, 24" in the ground and surrounded with a mound of earth and stone. Cap marked as shown in corner diagram.

Utilized 1979 bearing tree for section 4 bearing tree:

A 9" white fir bears N89°W-28.3' scribed 1/4 S4 BT-BT, on partly healed double blaze.

Established new bearing tree:


A 9" white fir bears N43½°E-44.3' scribed 1/4 S3 BT.

Obliterated marks on the 8" doug. fir bearing tree marked for section 3 in 1979.

New bearing tree has a brass washer stamped PLS 1106 nailed to face of blaze. Attached sign 54-3 and 54-9 and painted face of blaze and a 6" red band around each bearing tree. Set steel fence post North of corner and attached sign 54-9.

Compass declination- 19° East.

This corner was remonumented on May 22, 1987 and witnessed by Bill Blanford.

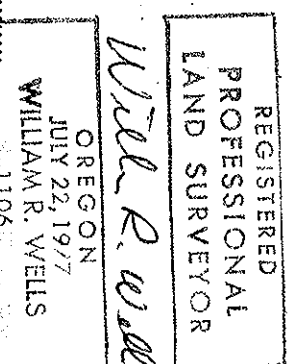

Office of... County Surveyor ..... County of... MORROW  
 State of... OREGON....., I hereby certify that the within instrument was filed in this office  
 for record on the... 15... day of... October....., 1987  
 ..... by ..... (DEPUTY)